

PALAZZO




BLISSXRT
Re'birth your's floor

Overview

FRESH CARPET Looks




802

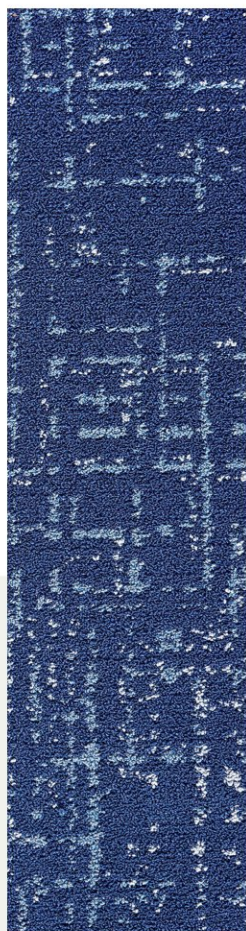

804



805

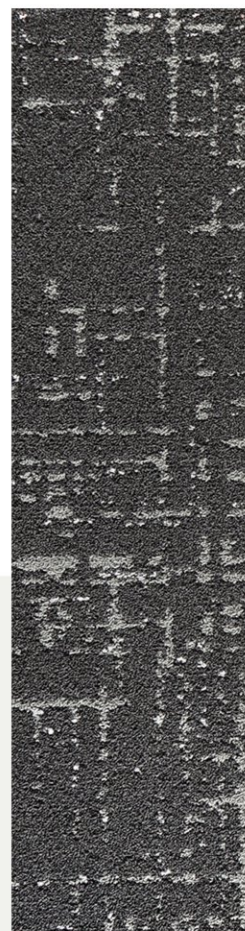

809

NOTE

- Photos are showing only the design patterns.
- The color of the sample pasted is only showing part of the actual carpet.
- Specifications are subject to change when they improve product.
- Slight colour variations may occur from dye lot to dye lot.

PALAZZO



802

PALAZZO



802








PALAZZO

CARPET PLANKS


TECHNICAL SPECIFICATIONS

Design Name	Palazzo
Fibre	Universal PP
Construction	High Definition Color Point
Machine Gauge	1/10"
Pile Height	6 mm
Total Height	10 mm
Pile Weight	850 Gms/m ²
Primary Backing	Non Woven Lutrador
Secondary Backing	PVC + Fibre Glass
Size Per Tile	25cm X 100cm
No. Of Tiles Per Box	20 Pcs Per Box (5m ²)
Instalation	Surface Tackifier
Antistatic Properties	Permanently Antistatic
Area of use	Commercial, Residential, Hotel ,
Packing	5sqm/20pcs per box
Flammability	ASTM D2859
Smoke Density	ASTM E-662-09, <450
Dimensional Stability	ASTM D7570-09, <0.2%
Tuft Bind	24N
Static Propensity	GB/T 18044-2008
Stain Resistance	GB/T 18044-2008, 1.0KV
Colorfastness to Crocking	ASTM D5252, >5
Colorfastness to Light	ASTM D5252, >5
Indoor Air Quality	GB 18587-2001


INSTALLATION METHODS




Herringbone



Ashler



Monolithic



Brick

DISCLAIMERS

- According to international Carpet manufactured norms color may differ from dye lot to dye lot within tolerance.
- Please take note of the day lot number on the cartons before installing the tiles.
- Recommended laying of Carpet tiles : Checkered board pattern.

PHYSICAL PROPERTIES



Isolation Acoustic



Isolation Thermic



Chaises Roulettes



Anti-static



Colorfast



Wear Warranties



Anti Flammability