


PURELUX

BLISSXRTTM
CARPET TILES
Re'birth your's floor

Overview

FRESH CARPET Looks

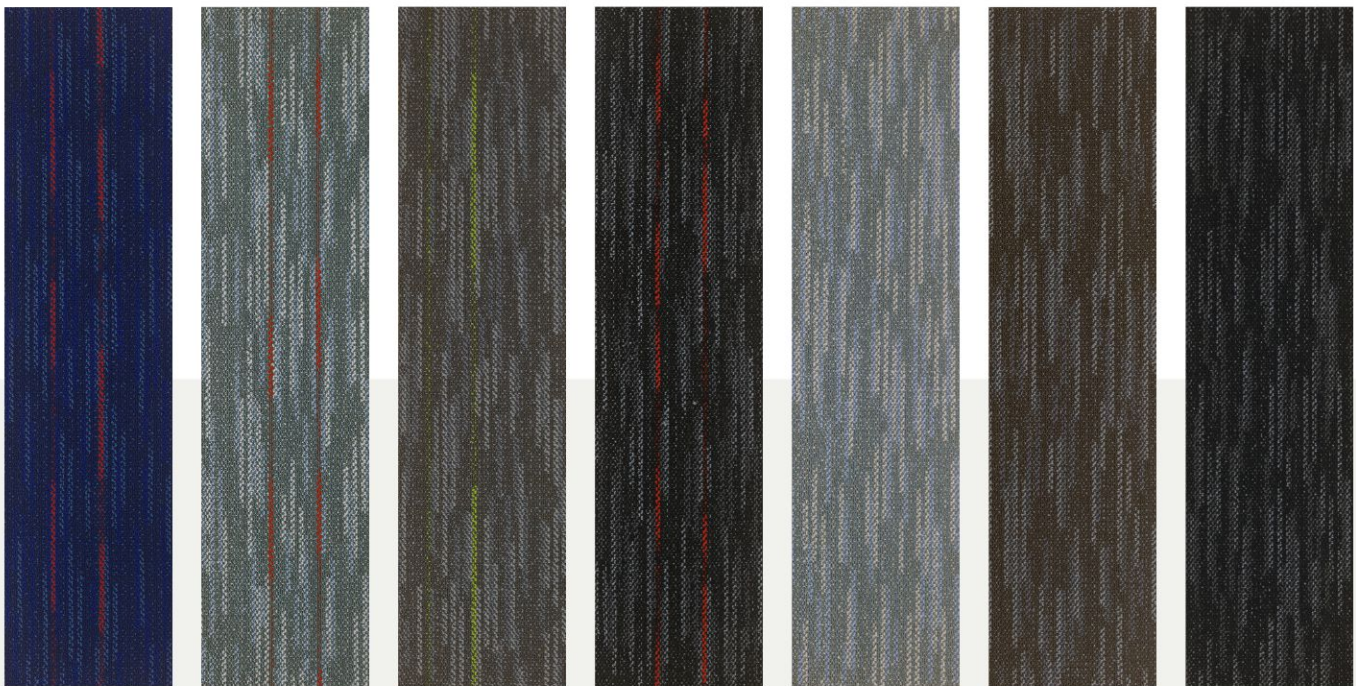

834

835

837

839

9835

9837

9839

NOTE

- Photos are showing only the design patterns.
- The color of the sample pasted is only showing part of the actual carpet.
- Specifications are subject to change when they improve product.
- Slight colour variations may occur from dye lot to dye lot.





PURELUX



837 and 9837

PURELUX



835 and 9835



839 and 9839



PURELUX



835 and 9839



9839


PURELUX

CARPET PLANKS


TECHNICAL SPECIFICATIONS

Design Name	Purelux
Fibre	Camifin PP
Construction	Multi Level Scroll
Machine Gauge	1/12"
Pile Height	4-5 mm
Total Height	7-8 mm
Pile Weight	700 Gms/m ²
Primary Backing	Non Woven Illustrator
Secondary Backing	PVC + Fibre Glass
Size Per Tile	25cm X 100cm
No. Of Tiles Per Box	20 Pcs Per Box (5m ²)
Instalation	Surface Tackifier
Antistatic Properties	Permanently Antistatic
Area of use	Commercial, Residential, Hotel ,
Packing	5sqm/20pcs per box
Flammability	ASTM D2859
Smoke Density	ASTM E-662-09, <450
Dimensional Stability	ASTM D7570-09, <0.2%
Tuft Bind	24N
Static Propensity	GB/T 18044-2008
Stain Resistance	GB/T 18044-2008, 1.0KV
Colorfastness to Crocking	ASTM D5252, >5
Colorfastness to Light	ASTM D5252, >5
Indoor Air Quality	GB 18587-2001


INSTALLATION METHODS




Herringbone



Ashler



Monolithic



Brick

DISCLAIMERS

- According to international Carpet manufactured norms color may differ from dye lot to dye lot within tolerance.
- Please take note of the day lot number on the cartons before installing the tiles.
- Recommended laying of Carpet tiles : Checkered board pattern.

PHYSICAL PROPERTIES



Isolation Acoustic



Isolation Thermic



Chaises Roulettes



Anti-static



Colorfast



Wear Warranties



Anti Flammability